

## FEATURES

- Injection-molded, flame-retardant and high impact thermoplastic housing, UL 94V-0 flame rating. Emergency lights become life savers when there's a power outage, fire, poor weather conditions or natural disasters. Great for placing on stairways, hallways, doorways, isles, restaurant, office building and warehouses.
- Use long-lasting, efficient ultra bright white LEDs. Each side of the emergency light has bright adjustable floodlights on the sign for maximum visibility. 360° rotation, the flexibility of the light direction allows you to point the lights at almost a 90 degree angle.
- Emergency light built-in 3.6V 600mAh Nickel cadmium backup battery, provides 90 minutes of emergency operation during a power outage. High-output battery, 100-277V for both residential and commercial emergency application.
- Can be wall or ceiling mounted, universal J-box mounting pattern. Test switch and status indicator let you know the emergency lights has power and the battery is working.
- Our LED emergency lights are offered high quality products at affordable prices backed by 5 year warranty and professional after-sales support.

## LED EMERGENCY LIGHT DM-EM110



## DIMENSIONS




## PRODUCT DISPLAY



Ultra bright LED head  
 High performance  
 chrome-plated metallized  
 reflector and plastic lens for  
 optimal light distribution. 2W  
 LED lamp Heads equipped  
 with 12 series-parallel white  
 LEDs each.



Battery connector  
 Quick connect battery  
 connector, battery comes  
 disconnected. Internal  
 solid-state transfer switch  
 automatically connects the  
 internal battery to LED lamp  
 heads for minimum 90-min-  
 ute emergency illumination.

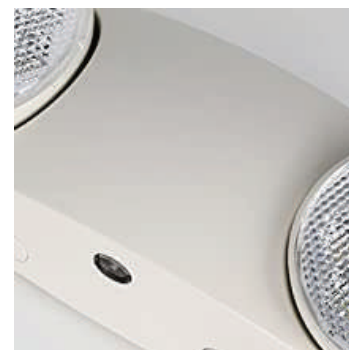

High impact housing  
 Injection-molded, 5VA  
 flame-retardant and high  
 impact thermoplastic hous-  
 ing, this led emergency lights  
 have high-impact resistant.

## MULTI-ANGLE ROTATION



### Simple installation instruction




Fig. A(J-Box)

#### Step 1

Connect wire between J-BOX and mount plate



Fig. B

#### Step 2

Battery connection




Fig. C

#### Step 3

Check inside connection




Fig. D

#### Step 4

Put housing to the mount plate

Input AC cable

Working Voltage: AC100-277V  
50/60Hz

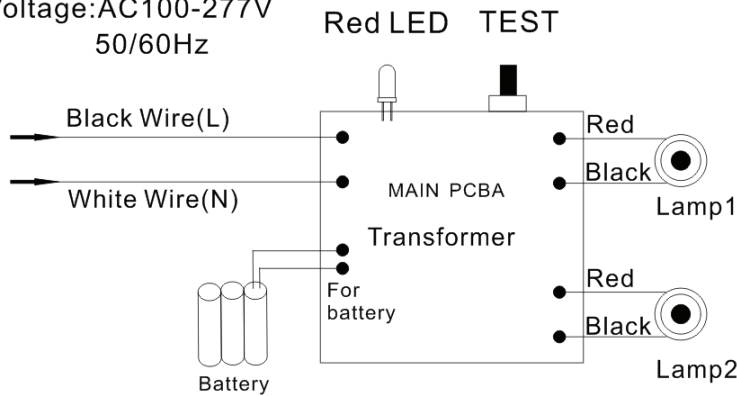

## SPECIFICATIONS

Model	DM-EM110	Circuitry
AC120V 50/60Hz	Input Wattage: 4 W	<ul style="list-style-type: none"> <li>• Emergency duration: <math>\geq 90</math> mins</li> <li>• Recharge time: 24 hours</li> <li>• Output wattage 2x1 W</li> <li>Light source: Ultra bright LED</li> <li>• Color temperature: 6000 K</li> <li>• Ni-ed Battery: 3.6V 600mAh AA</li> </ul>
	Input Current: 0.03 A	
	Efficiency: 0.97 P	
AC277V 50/60Hz	Input Wattage: 4.5 W	
	Input Current: 0.03 A	
	Efficiency: 0.94 P	

DISTRIBUTED BY:



1010 Martin Luther King Jr. Pkway.  
Suite 200  
Durham, NC 27713  
www.epoweron.com

Contents are subject to change without notice.