

PROJECT: _____

CATALOGUE #: _____

FIXTURE TYPE: _____

NOTES: _____

YGB-094WR

15 AMP GFCI RECEPTACLE (WEATHER RESISTANT, TAMPER RESISTANT)

DESCRIPTION




1. Constructed with premium high-impact resistant thermoplastic materials and rational structure design, ensures superior strength and durability.
2. Two Indicator Light provides simple, intuitive feedback on power and protection status. If the indicator (LED) glows green, you have installed the GFCI receptacle correctly and it is working properly. The GFCI outlet automatically conducts a Self-Test(the red light will blink once) every 40 seconds to ensure the GFCI is continually working. When the GFCI receptacle reaches the end of its' life the red indicator will turn on, it reminds you to replace the outlet in time.
3. Weather Resistant - enhanced corrosion resistant components to withstand more moist or humid location.
4. Tamper resistant(TR) -- TR design increases the electrical safety level by preventing the attempting to insert objects in to the outlet or open the plate.
5. Provides continuous ground fault protection -- detects and trips on actual ground fault even when self-test is being conducted.



COMMON TECHNICAL DATA

Size	105*42.8*40.7mm
Color	Cover: White (Customizable) Base: Black (Customizable)
Enclosure	PC
Terminal	Copper Alloy Acid Pickling
Mounting Yoke	Zinc Plated Steel
Weight	123g
Certification	cULus
Standards	UL498/UL943/CSA C22.2 No.144.1
Receptacle Rating	15A/125Vac
Dielectric Voltage Withstand	1500V (AC)
Mechanical Life	6000 times
Flame Class	UL-94 V2
Trip Threshold	5mA
Trip Time	<25mS
Insertion Force	<178N
Release Force	<67N
Retention Force	>13N
Wires	12-14AWG

DIMENSIONS

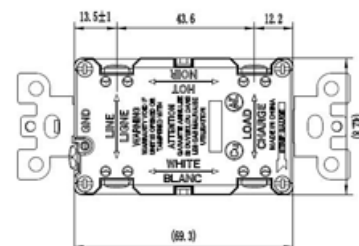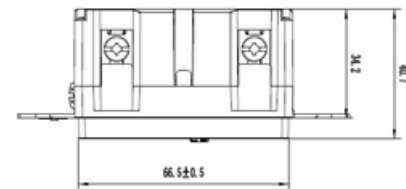

DISTRIBUTED BY:



1010 Martin Luther King Jr. Pkway.
Suite 200
Durham, NC 27713
www.epoweron.com

Contents are subject to change without notice.