


UFO High Bay Light

150W/200W/240W



Certificates



Features

- Cold forging process, high stability.
- High lumen efficiency and color rendering.
- No flickering, no dazzling, high brightness.
- Long life span, 5 years warranty.
- OEM available.
- Remoted control Available


Application

This product is suitable for factories, workshops, warehouse, toll stations, gas stations, stadiums, supermarket, exhibition, commercial building, stadium hall, parking building etc .




Dimension(Unit:mm)

150W/200W: $\phi 285 \times 117$ mm

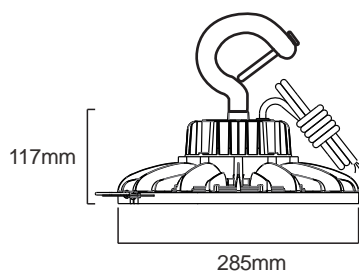

240W: $\phi 320 \times 154$ mm

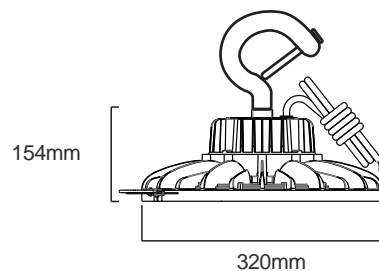


Specifications

Item	UL-H150W-AS	UL-H200W-AS	UL-H240W-AS
Dimension	φ285*117mm		φ320*154mm
Voltage	AC100-277V 50/60HZ		
Power	150W	200W	240W
Light Efficiency	190lm/W		
Lumen (±10%)	28500lm	38000lm	45600lm
Color Temperature (CCT)	5000k		
Beam Angel	60°/90°/120°		
Color Rendering Index (CRI)	Ra≥70		
LED Type	SMD2835		
Power Factor (PF)	≥0.95		
IP Rank	IP 65		
Certificate	CE/CB/ETL/SAA/C-TICK		
Material	AL+PC		

Wiring Connection

- * Turn off the power , connect AC wire
- * Black wire to L , white wire to N , and green wire to E.
- * Connect wires as below,Purple wire is DIM+,pink wire is DIM-,Black/White wire is 12V+

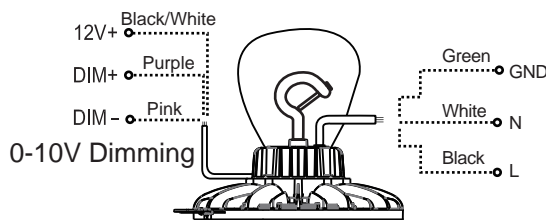


(Tip: The above content is for reference only, please take the real thing as the criterion.)

Accessories

 <p>UL-MS-SMW-LVP 12V Microwave motion Plug-in</p>	 <p>E1MS-SMW-RC Occupancy Sensor configuration remote</p>	 <p>EL-UFOEM Emergency Battery Backup</p>	 <p>UL-HBC-LENS Drop Lens</p>	 <p>UFO-PAD-1/2 1/2"Interface</p>
 <p>ES-TB325-01 480V TO 120V</p>	 <p>UL-MNT-UB Angle Adjustable</p>	 <p>UL-HBACC-ALREF Aluminum Reflector</p>	 <p>UL-HBA-R Prismatic Reflector for high bay</p>	 <p>UFO-PAD-3/4 3/4"Interface</p>

Highlights



UL-MNT-UB

UL-MNT-UB has many optional accessories such as the angle adjustable surface mount U-bracket, reflectors, wire guards, and more.



HOOK

1/2" Female threading, interchangeable hook mount with supplementary safety cable. (included) can be replaced with all thread for pendant mount (1/2" Standard Thread Rod)



WIRE

Provided with 6-foot input cord, 5 circuit leads for power and dimming.

Model Naming Rule

UL

corporate name

H

product name

240W

power

AProduct
series number**S**

sensor